

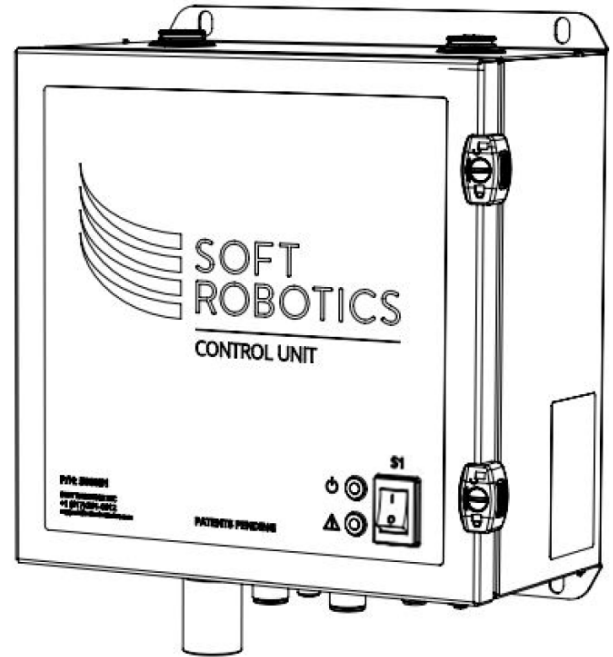
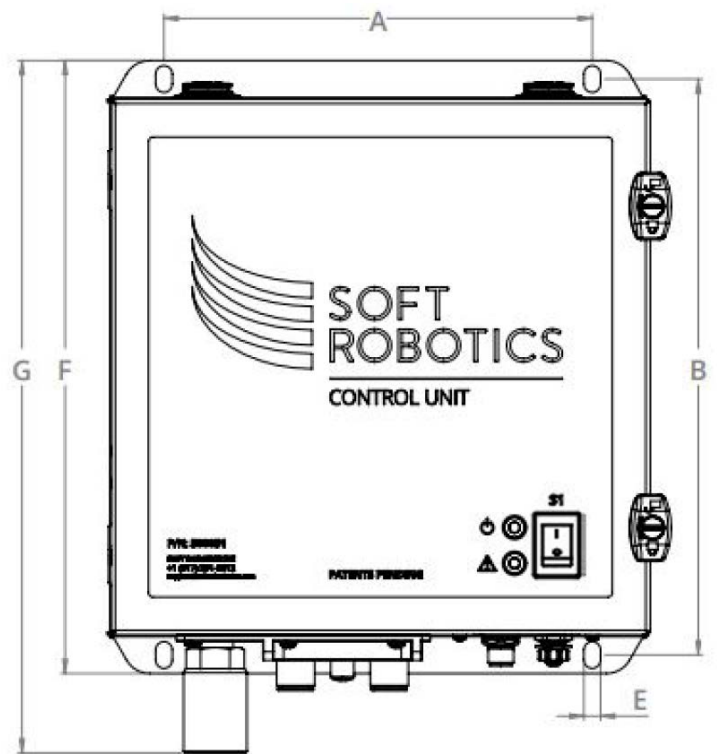


Power Requirement	24 VDC +/- 10% @ 0.5 A
Digital Interface	24 VDC digital I/O 4 inputs - source / sink 2 outputs – source 9.8 mA
Stored Profiles	8 Setting profiles (Grip / Release) selectable in real-time
IP Class	Designed to IP65
Air Requirement	85-100 psi @ 2-8 scfm conditioned per ISO 8573-1 [5:5:4]

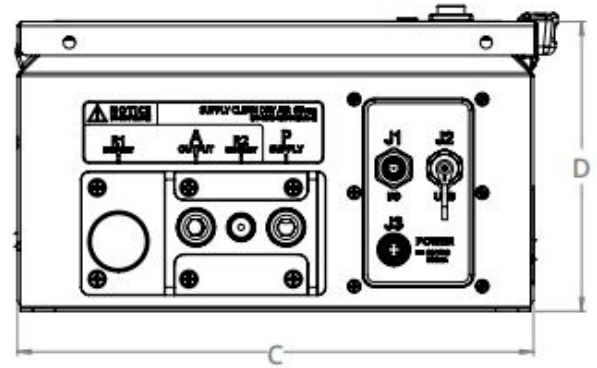

Specification	Value	Notes
Mass	6.3 kg	
Mounting Orientation	No restrictions	Preferred as shown with I/O connections facing downward
Dimensions (H x W x D)	33 cm x 26 cm x 14 cm	
Mounting Screw Size	(4) @ M6 or 1/4"	
Output Air Pressure	-10 to +14 psig	
Operating Environment	5 – 40 C / 80% non-condensing humidity	
Air Connection	12 mm diameter tubing push-to-connect	PU hardness A95 Nylon hardness D55

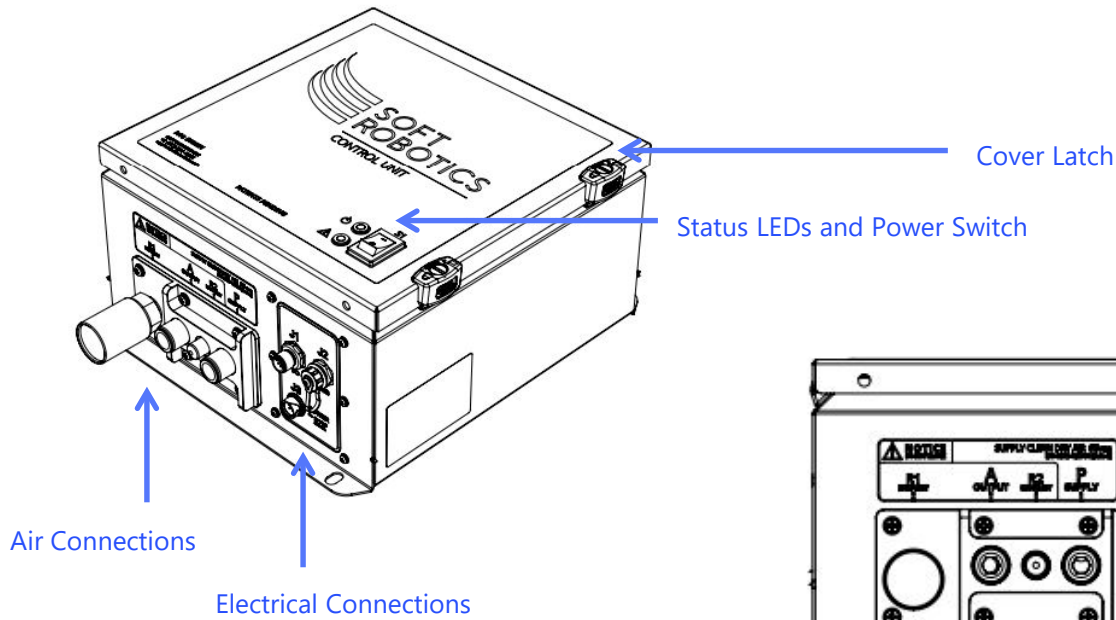

Specification	Value
A	203.2 mm
B	273.1 mm
C	254.0 mm
D	139.6 mm
E	7.9 mm
F	290.6 mm
G	328.3 mm